



Anwendung/Application :

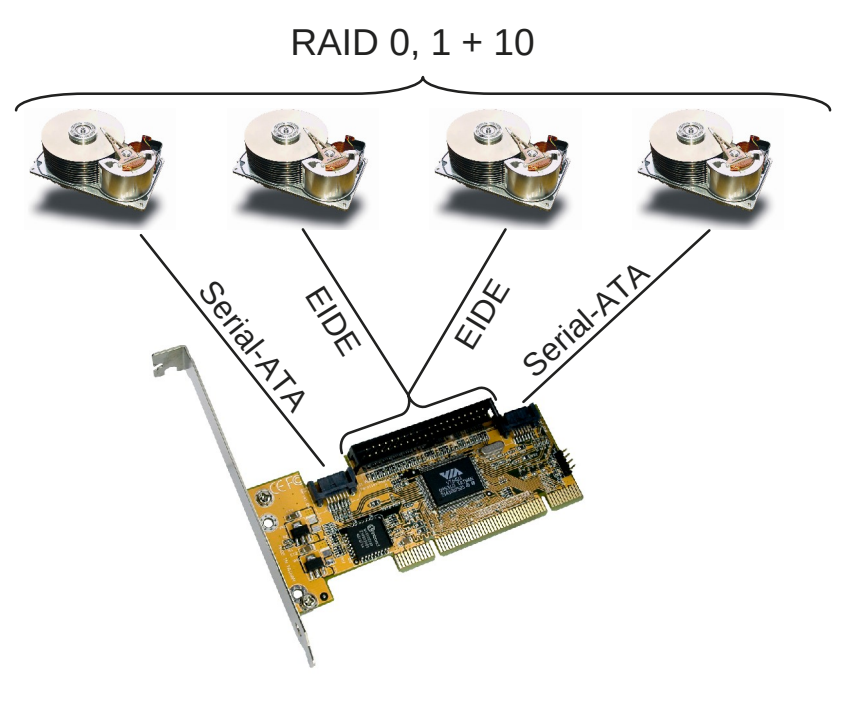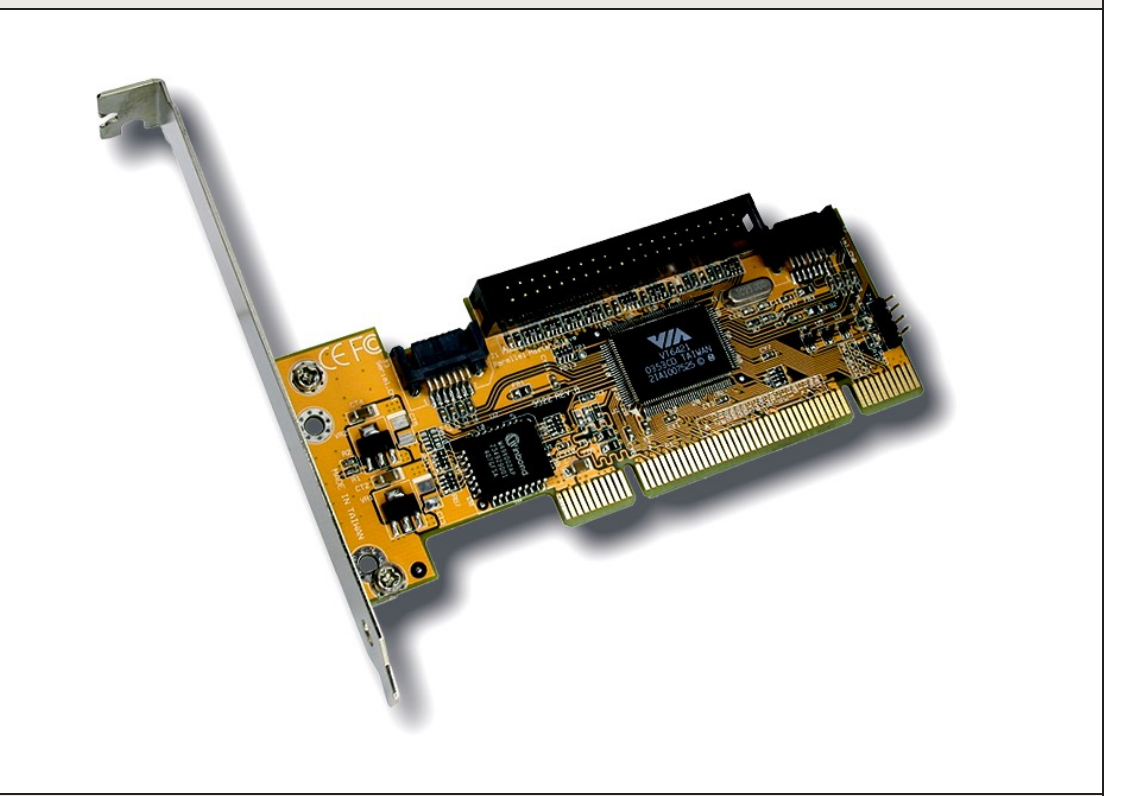





Operating System (OS):	Geprüft/Approved:	Verpackung/Packing:
      		

EIDE DMA133 + S-ATA RAID 0/1 Combo Controller

Beschreibung :	• Der EX-3327 ist ein EIDE und S-ATA Controller mit der PCI- und PCI-X-Bus Technologie für alle P-ATA und S-ATA Festplatten Laufwerke. Mit dem eigenen BIOS kann auch vom Controller gebootet werden und es kann RAID 0 (Stripping / Geschwindigkeit) und RAID 1 (Mirroring / Datensicherheit) eingestellt werden.
Merkmale :	• 32-Bit PCI Enhanced IDE + S-ATA Combo Controller für zwei P-ATA und S-ATA Festplatten • Gleichzeitig mit den IDE Ports vom Motherboard einsetzbar • Kompatible zu alten UDMA 33, 66 und 100 Festplatten • Unterstützt Festplatten über 128GB • Unterstützt 80 Pin IDE/ATA 133 Kabel • Unterstützt Motherboard mit 5V PCI-Slot oder 3.3V PCI-X Slot • Kann auch als LowProfile Controller eingesetzt werden • Bemerkung ! Nur für Festplatten. Nicht für CD-ROM, DVD usw. einsetzbar
Chip-Set :	• VIA 6421A
Datentransfer-Rate :	• P-ATA bis 133MB/Sek., S-ATA bis 150MB/Sek.
Anschlüsse :	• 1 x Interner 40 Pin High Density DMA 133 IDE Ports für zwei 2HDD, 2 x 7 Pin Serial-ATA
Arbeitstemperatur : Luftfeuchtigkeit :	• 0 bis 55^{0}C • 5 bis 95%
Hardwaresysteme :	• PCI-Bus 32-Bit oder PCI-X 64-Bit Bus
Abmessung / Gewicht :	• 127 x 67 mm / 300g
Lieferumfang :	• EX-3327, 1 x 40 Pin High Density EIDE Datenkabel, 2 x 7 Pin S-ATA Kabel, Treiber CD, Handbuch

EIDE DMA133 + S-ATA RAID 0/1 Combo Controller

Description:	• The EX-3327 is the most powerful IDE controller to accommodate hard disk drives with the technology of PCI and PCI-X Bus. With the own BIOS the controller can boot and setting the RAID 0 (Stripping / Speed) and RAID 1 (Mirroring / Safety).
Feature :	• 32-Bit PCI Enhanced IDE + S-ATA Combo Controller for two P-ATA and S-ATA hard disk • Co-resides with Motherboard IDE device • Compatible to old UDMA 33, 66 und 100 hard disk • Support hard disk over 128GB • Support 80 Pin IDE/ATA 133 cable • Support Motherboard with 5V PCI-Slot or 3.3V PCI-X Slot • If possible to install the controller as a LowProfile Controller • Remark ! Only for hard disk. Not use for CD-ROM, DVD ect. Only for hard disk. Not use for CD-ROM, DVD ect.
Chip-Set :	• Silicon Image
Data transfer rate :	• P-ATA up to 133MB/Sec., S-ATA up to 150MB/Sec.
Connectors :	• 2 x Internal 40 pin High Density DM 133 IDE port
Operating Temperature : Operating Humidity :	• 0 up to 55^{0}C • 5 up to 95%
Hardware system :	• PCI-Bus 32-Bit or PCI-X 64-Bit Bus
Size / Weight :	• 127 x 67 mm / 300g
Packaging contents :	• EX-3327, 1 x 40 Pin High Density data cable, Driver CD, Manual